



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

140410120  
IB/04/05137 Item II

REC'D 13 AUG 2004

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

04100460.7 ✓

**PRIORITY DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH  
RULE 17.1(a) OR (b).

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk



Anmeldung Nr:  
Application no.: 04100460.7 ✓  
Demande no:

Anmeldetag:  
Date of filing: 09.02.04 ✓  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Koninklijke Philips Electronics N.V.  
Groenewoudseweg 1  
5621 BA Eindhoven  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se referer à la description.)

Loudspeaker with undulated membrane

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

H04S7/00

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL  
PT RO SE SI SK TR LI

**Loudspeaker with undulated membrane**

The invention relates to a loudspeaker which is provided with a frame, a membrane and a drive unit.

5           Such speakers are generally known. In Figure 8 of the accompanying drawing a known loudspeaker is depicted. This speaker has a frame (1), a membrane (2) and an electromagnetic driving unit (4). The membrane is formed by a conical body (2a) and has a flat outer circumferential edge (2b) and a flat inner circumferential edge (2c). The driving unit is provided with a stationary part (4a) and a movable part (4b). The stationary part,  
10 which includes a permanent magnet and a magnetic yoke, is secured to the frame. The movable part includes a voice coil and a cylindrical coil support (4b1). The membrane is at its outer circumferential edge connected to the frame by means of a flexible suspension (6) and is at its inner circumferential edge adhered to the coil support, which in its turn is connected to the frame by means of a spider (8).

15           The conventional conical body of the membrane of the depicted known loudspeaker has a certain height in order to obtain sufficient stiffness. The membrane should have a certain minimal stiffness in order to be able to move like a piston for low frequency reproduction and to have a controlled behavior at and above the first break-up of the membrane for mid and high frequency reproduction. For this reason there arise problems  
20 relating to the speaker's performance if a shallow speaker, i.e. a speaker having a small height, is required in certain applications.

          From JP-A 54-6523 a shallow speaker is known, which is provided with a faintly conical diaphragm having a corrugation structure for improving the behavior of the diaphragm. The diaphragm has an outer circumferential part glued to an elastic suspension  
25 ring and an inner circumferential part glued to a voice-coil bobbin. The corrugation structure is formed by radial corrugations which decrease towards the outer circumferential part and which increase towards the inner circumferential part. Due to this structure the outer circumferential part includes a flat ring-shaped outer edge glued to the suspension ring and

the inner circumferential part includes an undulating inner edge glued to the bobbin. The speaker is further provided with a spider secured to the voice-coil bobbin.

Although the speaker known from JP-A 54-6523 comprises means meant for solving the problem relating to lack of stiffness of a faintly conical diaphragm, it causes another problem, viz. a problem relating to the instability of the diaphragm movements due to the small axial distance between the suspension means formed by the suspension ring and the spider.

An object of the invention is to provide a loudspeaker which can be given a small height without deteriorating its sound performance and with stable membrane movements during use.

This object is achieved with the loudspeaker according to the invention which is provided with a frame, a membrane and a drive unit, the membrane having an outer circumferential edge suspended from the frame and an inner circumferential edge, the driving unit having a stationary part secured to the frame and a translatable part secured to the inner circumferential edge of the membrane, wherein the membrane includes a membrane body having, considered in a circumferential direction, a pattern of folds radially extending between the inner circumferential edge and the outer circumferential edge of the membrane, which folds have a depth, considered from the membrane body towards the driving unit in a direction substantially perpendicular to the membrane, increases from said edges towards an area situated between the inner circumferential edge and the outer circumferential edge, in which area the folds are provided with faces, wherein a suspension means is provided which is secured to the frame and said faces.

The loudspeaker according to the invention is provided with a membrane body which is such undulated that fold portions are provided in said area which are suitable for fixing the suspension means, such as a spider known per se. These integrated fold portions are situated at a considerable axial distance, i.e. the distance seen along a movement direction of the membrane, to the suspended outer circumferential edge of the membrane. In this way the loudspeaker according to the invention has a suspension which enables both a large stroke and stable movements of the undulated membrane. Moreover the specifically corrugation structure of the membrane enables excellent acoustical performances due to its excellent stiffness and light weight.

It is to be noted that EP-A 914 020 discloses a loudspeaker with a flat membrane which is provided with a ring-shaped supporting element to which a centering membrane is secured. The ring-shaped supporting element is provided at the flat membrane side opposite to the drive unit of the speaker. The supporting element extends around the middle axes of the speaker and serves for counteracting tumbling of the flat membrane. Such a ring-shaped supporting element is not suitable for a membrane provided with a pattern of folds, as is the case in the loudspeaker according to the invention.

A preferred embodiment of the loudspeaker according to the invention has the characteristic feature that the inner circumferential edge and the outer circumferential edge of the membrane are substantially flat edges.

The loudspeaker according to this embodiment is provided with a membrane which is only undulated in an area extending between its substantially flat circumferential edges. Because of this measure this loudspeaker is production-friendly as the circumferential edges are or are at least practically flat whereby the connection of the membrane with the frame and the fixation of the membrane to the coil support can take place in conventional ways generally known for mounting flat membranes. This fixation of the flat inner circumferential edge of the membrane to the coil support can be realized by means of a suitable glue, as in common practice.

It is to be noted that the expression "substantially flat" has the meaning of flat or practically flat in this document. A deviation, if any, of flatness of the edges must be small compared with the maximal depth of the folds.

Because of the specific corrugated structure applied into the membrane body of the loudspeaker according to the invention, the membrane is reinforced over its surface and has sufficient stiffness to be suitable as swallow membrane. The degree of undulations depends on the shape of the folds. The folds may be in principle of each shape, such as round or sharp. The pattern of folds is preferably regular, e.g. uniform, seen in a circumferential direction.

A swallow loudspeaker provided with a membrane as above described has an excellent sound performance, due to its good behavior at and above the first break-up. In other words also at and above the first break-up there is hardly distortion of the reproduced sound.

Preferably, the folds have a depth, measured from the membrane body, which smoothly decreases towards the substantially flat outer circumferential edge and/or the substantially flat inner circumferential edge of the membrane.

In a practical embodiment the membrane body is a concave body, particularly a slightly concave body, the substantially flat inner circumferential edge and the substantially flat outer circumferential edge being in parallel planes. In this case, the membrane body is preferably a truncated slightly cone-shaped body. In general the inner circumferential edge is circular; the outer circumferential edge may be of a different form, such as more or less elliptical or rectangular.

Another practical embodiment has the feature that the membrane body is a body of which the inner circumferential edge, particularly the substantially flat inner circumferential edge, and the outer circumferential edge, particularly the substantially flat outer circumferential edge, are situated in substantially coinciding planes or zones.

It is practical to adhere the suspension means, particularly the spider, to the faces of the folds, which are, as described above, located in the area between the inner and outer edges of the membrane, by means of an adhesive.

It is also practical to adhere the membrane to the movable part of the driving unit, particularly to the coil support thereof. For these purposes existing suitable glues may be used.

It is to be noted that the loudspeaker according to the invention is suitable for sound reproduction in hifi, home, automotive, tv and multimedia systems and it is particularly suitable for applications having very small built-in depths.

The invention also relates to a membrane as defined in Claim 10.

With regard to the Claims it is noted that various combinations of embodiments and features as described in the Claims are possible within the scope of the invention.

The invention will now be described in more detail, by way of example, with reference to the drawings, in which

Figs. 1 to 3 show diagrammatically in cross-sections three embodiments of the loudspeaker according to the invention,

Fig. 4 is a diagrammatical top view of the membrane shown in Figure 1,

Fig. 5 is a diagrammatical cross-section of the membrane shown in Fig. 1,

Fig. 6 is a fold/shape-fold distribution diagram of the membrane of the embodiment shown in Fig. 1,

Fig. 7 shows diagrammatically in cross-sections a further embodiment of the loudspeaker according to the invention, and

Fig. 8 shows diagrammatically a conventional loudspeaker.

5

The loudspeakers depicted in the Figures 1 to 3 are provided with a frame 101, a membrane 103 and an electromagnetic drive unit 105. The membrane 103 has an in principle flat membrane body 104 provided with a flat outer circumferential edge 104a and a flat inner circumferential edge 104b and is provided with a pattern of radial folds 104c, which  
10 pattern extends over the surface of the membrane 104, seen in circumferential direction. The folds 104c, have a depth (d) which increases from the outer edge 104a towards a middle area 104A formed by a ring-shaped zone between the edges 104a and 104b, and from the inner edge 104b towards this area 104A, whereby the maximum depth (d) is located in the area 104A. The folds 104c are provided with faces 104C in the area 104A. The membrane body  
15 104 may be made of e.g. paper, particularly reinforced paper. The drive unit 105 comprises a stationary part 106a and a movable, i.e. translatable, part 106b. The stationary part 106a is secured to the frame 101 and comprises a magnet system including a permanent magnet 107a and a magnetic yoke 107b, and the translatable part 106b comprises a coil system including a voice coil 108a and a coil former or support 108b on which the coil 108a is attached. The  
20 magnet system and the coil system magnetically cooperate with each other during use through an air gap 109. The coil support 108b is adhered to the inner circumferential edge 104b of the membrane 104 by means of a suitable glue which may be a known glue.

The outer circumferential edge 104a of the membrane 104 is connected to the frame 101 by a resilient means 113, such as a roll-collar known per se and made of e.g.  
25 rubber or foam.

The membrane 104 is also connected to the frame 101 by means of a suspension means, particularly a spider 111, which is at its outer rim secured to the frame 101 and at its inner rim secured to the faces 104C of the folds 104c, preferably by means of a glue. In the embodiment depicted in Figure 3 two spiders 111 have been applied.  
30

Instead of the in-principle flat membrane body, a slightly conical membrane body may be used, without losing the characterizing advantages of the invention.

The reference signs applied to the membrane depicted in the Figures 4 and 5 are identical to the signs used in the description of the embodiments of the Figures 1 to 3.

The diagrammatical presentation in Fig. 6 displays the folds 104c and the shape of the membrane 103. The folds 104c which are regularly distributed over the membrane face, have their maximum depth (d) in the middle area 104A.

The variant depicted in Figure 7 is provided with a frame (201), a membrane (203) and a drive unit (205). The membrane has a flat outer circumferential edge (204a) suspended from the frame (201) and a flat inner circumferential edge (204b). The driving unit (205) has a stationary part (206a) secured to the frame (201) and a translatable part (206b) provided with a coil support (208b) secured to the inner circumferential edge (204b) of the membrane (203). The membrane (203) includes a slightly conical membrane body (204), whereby the outer circumferential edge (204a) and the inner circumferential edge (204b) are not situated in a same plane, but are situated in parallel planes. The membrane body (204) has, considered in a circumferential direction, a pattern of folds (104c) radially extending between the inner circumferential edge (204b) and the outer circumferential edge (204a) of the membrane. The folds (104c) have a depth (D), considered from the membrane body (204) towards the driving unit (205) in a direction perpendicular to the membrane (203), which increases from the edges (206a, 206b) towards a middle area (204A) situated between both edges (206a, 206b). In this area (204A) the folds, or at least several folds, are provided with faces (204C). The membrane (203) is suspended from the frame (201) by means of a first suspension means in the form of a resilient ring-shaped element (213) known per se and a second suspension means in the form of a so-called spider (211) known per se. The ring-shaped element (213) is secured to the outer circumferential edge (204a) of the membrane (203) and to an edge portion of the frame (201). The spider (211) is secured to the faces (204C) of the membrane body (204) and to another portion of the frame (201).

It is to be noted that the disclosed embodiments are only given by way of example. Within the scope of the invention it is possible to combine different features of embodiments to build a loudspeaker in accordance with to the invention. Moreover it is possible within the scope of the invention to vary on the examples given. E.g. the regular pattern of folds may be replaced, if desired, by a non-regular pattern, or undulating inner and/or outer circumferential edges may be applied.



## CLAIMS:

1. A loudspeaker provided with a frame (101), a membrane (103) and a drive unit (105), the membrane having an outer circumferential edge suspended from the frame and an inner circumferential edge, the driving unit having a stationary part secured to the frame and a translatable part secured to the inner circumferential edge of the membrane, wherein  
5 the membrane includes a membrane body (104) having, considered in a circumferential direction, a pattern of folds (104c) radially extending between the inner circumferential edge and the outer circumferential edge of the membrane, which folds have a depth (d), considered from the membrane body towards the driving unit in a direction substantially perpendicular to the membrane, which increases from said edges towards an area (104A) situated between  
10 the inner circumferential edge and the outer circumferential edge, in which area the folds are provided with faces (104C), wherein a suspension means is provided which is secured to the frame and said faces.
2. A loudspeaker as claimed in Claim 1, wherein the inner circumferential edge  
15 and the outer circumferential edge are substantially flat edges.
3. A loudspeaker as claimed in Claim 1 or 2, wherein the inner circumferential edge and the outer circumferential edge of the membrane are situated in substantially coinciding planes or zones.  
20
4. A loudspeaker as claimed in Claim 2, wherein the membrane body is a slightly concave body, the substantially flat inner circumferential edge and the substantially flat outer circumferential edge being situated in parallel planes.
- 25 5. A loudspeaker as claimed in any one of the Claims 1 to 4, wherein the suspension means is a spider.

6. A loudspeaker as claimed in Claim 2 or 3, wherein the substantially flat inner circumferential edge of the membrane is secured to a coil support of the translatable part of the driving unit.

5 7. A loudspeaker as claimed in Claim 2 or 3, wherein the folds have a depth, measured from the membrane body, which smoothly decreases from the area as defined in Claim 1 towards the substantially flat outer circumferential edge of the membrane.

10 8. A loudspeaker as claimed in Claim 2 or 3, wherein the folds have a depth, measured from the membrane body, which smoothly decreases from the area as defined in Claim 1 towards the substantially flat inner circumferential edge of the membrane.

9. A loudspeaker as claimed in Claim 1, wherein the pattern of folds is a regular pattern, seen in a circumferential direction and/or in a radial direction.

15

10. A membrane presenting the features of the membrane disclosed in any one of the preceding Claims and thus constructed and evidently intended for use in the loudspeaker as claimed in any one of the preceding Claims.

**ABSTRACT:**

A loudspeaker provided with a frame (101), a membrane (103) and a drive unit (105). The membrane has an outer circumferential edge (104a) suspended from the frame and an inner circumferential edge (104b). The driving unit has a stationary part (106a) secured to the frame and a translatable part (106b) provided with a coil support (108b) secured to the inner circumferential edge of the membrane. The membrane includes a membrane body (104) having, considered in a circumferential direction, a pattern of folds radially extending between the inner circumferential edge and flat outer circumferential edge of the membrane. The folds have a depth (d) which increases from the edges (104a, 104b) towards an area (104A) situated between both edges. In this area the folds are provided with faces (204C), to which a spider (111) of the loudspeaker is secured. This loudspeaker combines a small height with a large stroke of the membrane.

**Fig. 1**

1/3

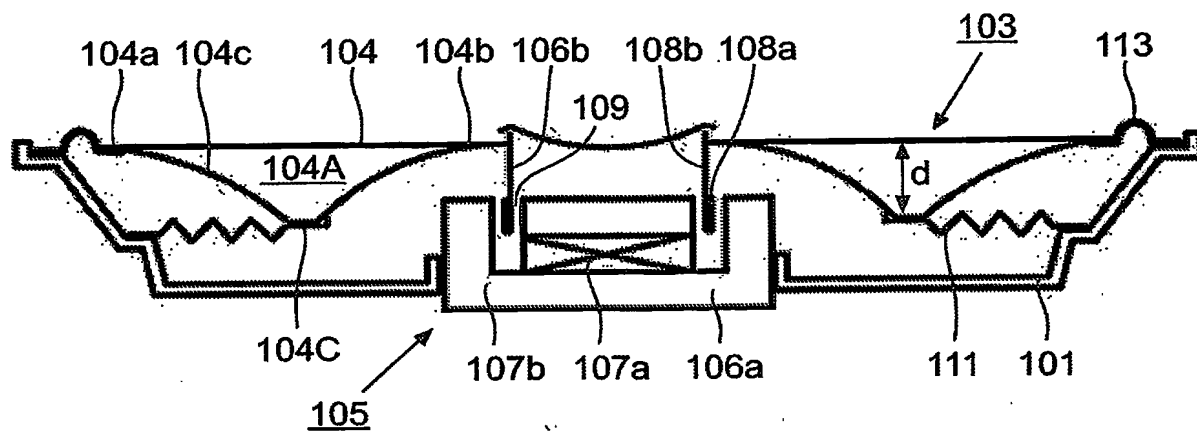


FIG. 1

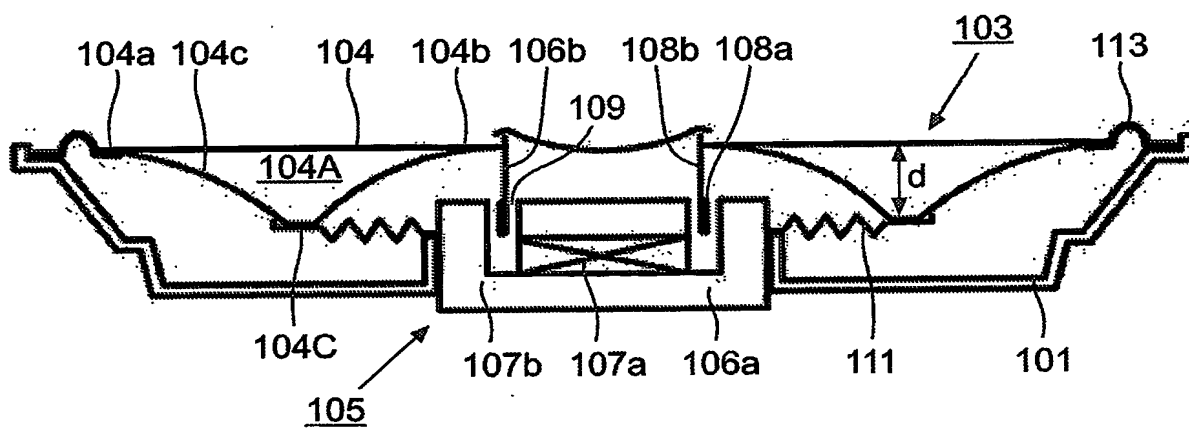


FIG. 2

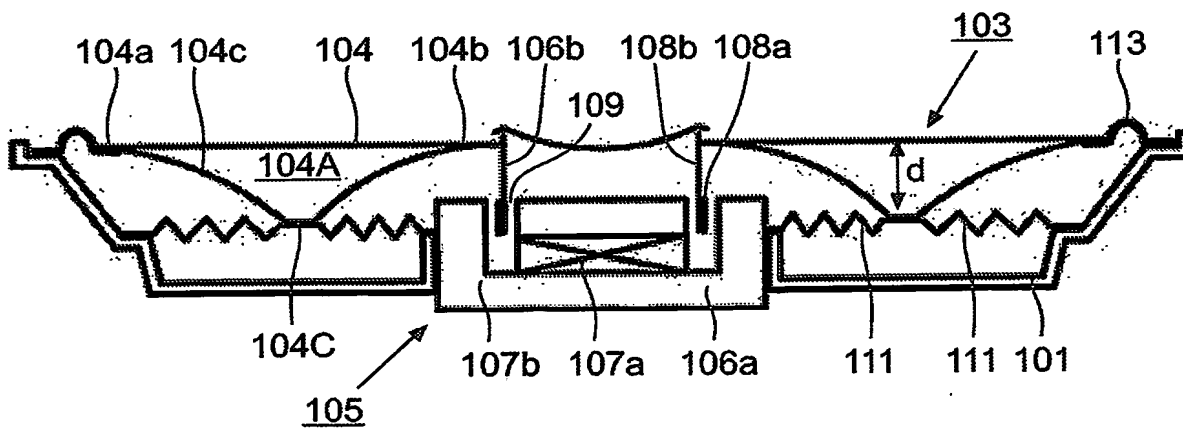


FIG. 3

2/3

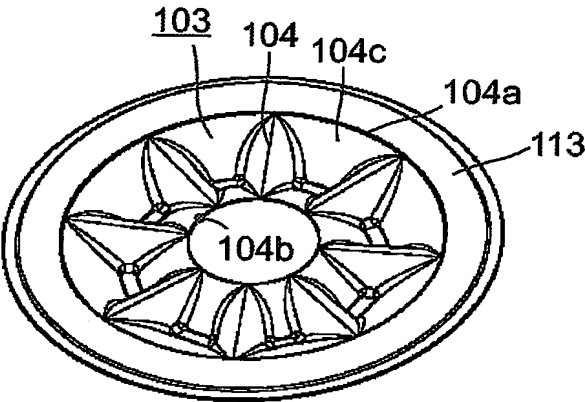


FIG. 4

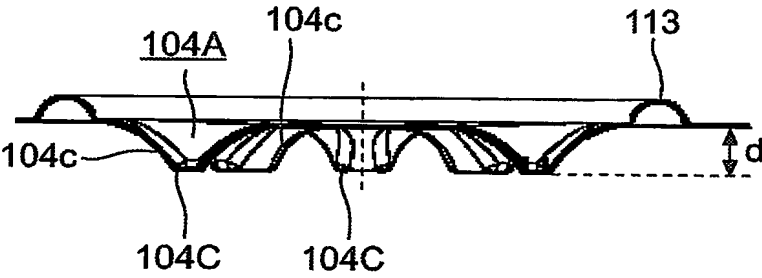


FIG. 5

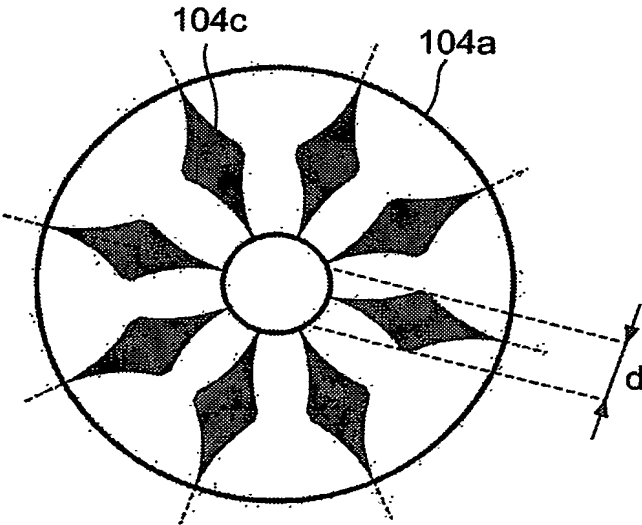


FIG. 6

3/3

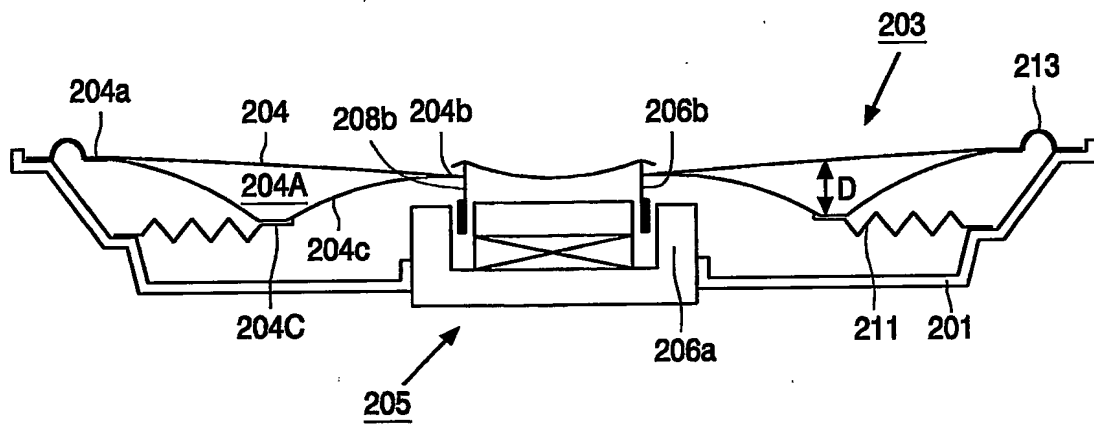


FIG. 7

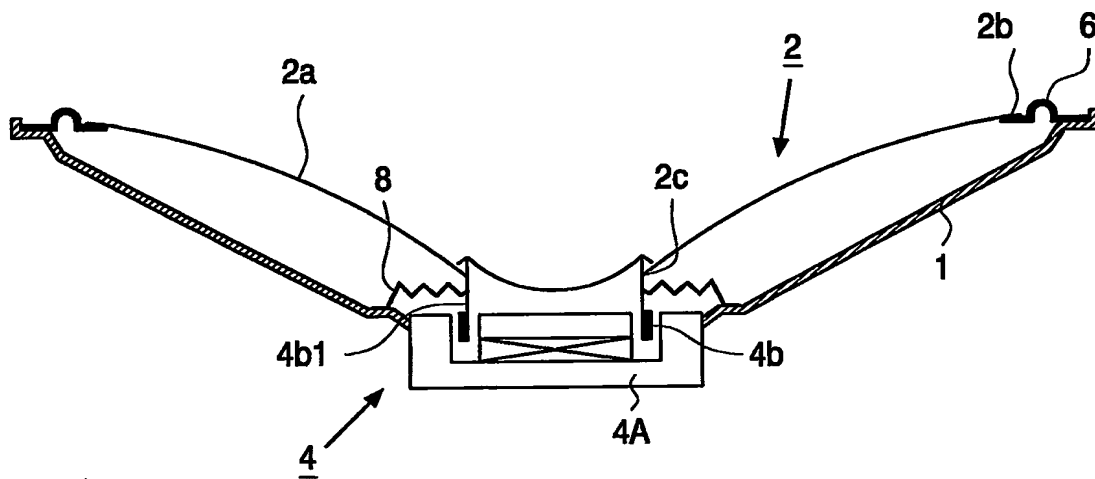


FIG. 8